



# ONWAVE HP

## DUAL AIR FLOW MULTI-DECK CHILLER

### FEATURES INCLUDE:


Dual air-flow  
 4 levels height adjustable  
 shelves + base  
 Shelf pricing holders  
 Canopy & end lighting inc switch  
 Double glazed end panels

White internal  
 Electronic temperature control  
 Manual night blind  
 Condensation removal via hot  
 gas discharge  
 Castor wheels  
 Shelf product fences (optional)



# ONWAVE HP

DUAL AIR FLOW MULTI-DECK CHILLER

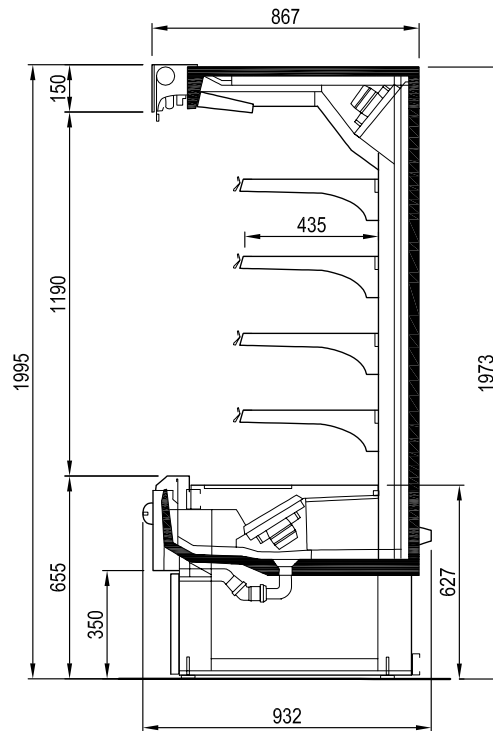

ONWAVE HP	90	120	180	240
* Operating temp (°C)	-1/+1	-1/+1	-1/+1	-1/+1
Refrigeration	Ventilated	Ventilated	Ventilated	Ventilated
Defrost	Automatic	Automatic	Automatic	Automatic
Power requirements	1ph / 10amp	1ph / 10amp	1ph / 15amp	1ph / 15amp
Nominal power (W)	1050	1150	1720	2050
Lighting power (W)	110	120	140	160
Display surface (m2)	1.09	1.46	2.19	2.91
Length including bumper (mm)	1085	1390	2003	2615
Height w/o castors (mm)	1995	1995	1995	1995
Height inc castors (mm)	2100	2100	2100	2100
Weight w/o packaging (kg)	230	280	400	530
M.E.P.S rating	3M1	3M1	3M1	3M1

\* Climate class 3 (25°C 60%R/H)

Information supplied as a guide only and is subject to change without notice.

Head office - WA  
6 Parkland Road  
Osborne Park WA 6017  
Phone 08.9242.5000  
Fax 08.9242.5055

Darra - QLD Branch  
24 Sudbury Street  
DARRA QLD 4076  
Phone 07.3715.8812  
Fax 07.3715.8867

Bunbury - WA Branch  
Unit 2,3 Halifax Drive  
BUNBURY WA 6230  
Phone 08.9726.0500  
Fax 08.9726.0400